

## Product Specifications and Ratings

### Polymer Properties



- Minimum Operating Temperature: -35°C
- Maximum Operating Temperature: 75°C
- Non-Flame Propagating
- All components are UV resistant
- UL Listed polymer used on solar panel junction boxes and connectors
- F1 Rated per UL746C, Suitable for UV Exposure and Water Immersion
- RTI of 120°C per UL 746B

### Wire Size Capacity

- Round PV Wire: 5 - 7 mm
- Oval Trunk Cable: 9.5 mm X 6.5 mm

### Module Frame Compatibility

- Flange Depth: 20 -10 mm
- Flange Thickness: 2.2 -1.2 mm
- Overall Frame Depth: 35 -20 mm

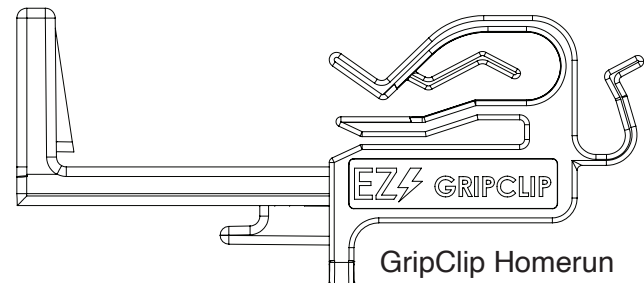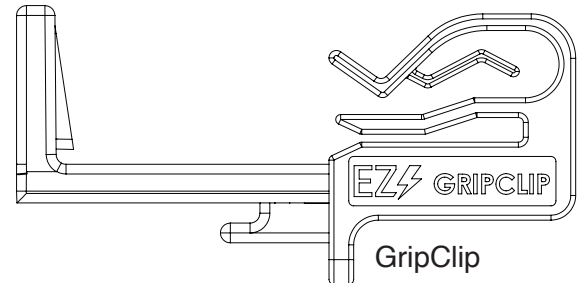

Tests	Standard
Installation Test	UL 1565
UV Exposure & Water Immersion	UL 746C
Flammability	ANSI/UL 94

Learn more about GripClip:



Easy Solar Products, Inc.



**Intertek**  
5030165  
Conforms to UL Std 1565  
Certified to CSA C22.2 #18.5