

“Stay Connected” with



Liquid Tight Cordgrips

a PennEngineering® Company

Heyco® -Tite Brass Liquid Tight Cordgrips

PG Hubs - Short Thread

The Ultimate in Liquid Tight Strain Relief Protection



CABLE DIA. RANGE				PART NO.	THREAD SIZE	PART DIMENSIONS							
Minimum		Maximum				A Clearance Hole Dia.		B Max. O.A. Length		C Thread Length		D Wrenching Flat Size	
in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.	in.	mm.
.138	3,5	.197	5,0	14945	PG 7	.496	12,6	.906	23,0	.236	6,0	.591	15,0
.197	5,0	.256	6,5	14946									
.256	6,5	.315	8,0	14947									
.236	6,0	.413	10,5	14948	PG 9	.602	15,3	1.102	28,0	.236	6,0	.709	18,0
.217	5,5	.472	12,0	14949	PG 11	.736	18,7	1.063	27,0	.236	6,0	.827	21,0
.315	8,0	.591	15,0	14950	PG 13.5	.807	20,5	1.142	29,0	.236	6,0	.945	24,0
.315	8,0	.591	15,0	14951	PG 16	.890	22,6	1.142	29,0	.236	6,0	.945	24,0
.492	12,5	.807	20,5	14952	PG 21	1.118	28,4	1.378	35,0	.276	7,0	1.181	30,0
.748	19,0	1.083	27,5	14953	PG 29	1.465	37,2	1.417	36,0	.315	8,0	1.496	38,0
1.024	26,0	1.378	35,0	14954	PG 36	1.858	47,2	1.575	40,0	.315	8,0	1.969	50,0
1.299	33,0	1.654	42,0	14955	PG 42	2.134	54,2	1.732	44,0	.394	10,0	2.165	55,0
1.457	37,0	1.929	49,0	14956	PG 48	2.343	59,5	1.890	48,0	.433	11,0	2.559	65,0

PG Hubs - Long Thread

The Ultimate in Liquid Tight Strain Relief Protection




CABLE DIA. RANGE				PART NO.	THREAD SIZE	PART DIMENSIONS							
Minimum		Maximum				A Clearance Hole Dia.		B Max. O.A. Length		C Thread Length		D Wrenching Flat Size	
in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.	in.	mm.
.138	3,5	.197	5,0	14960	PG 7	.496	12,6	1.063	27,0	.394	10,0	.590	15,0
.197	5,0	.256	6,5	14961									
.256	6,5	.315	8,0	14962									
.236	6,0	.413	10,5	14963	PG 9	.602	15,3	1.260	32,0	.394	10,0	.709	18,0
.217	5,5	.472	12,0	14964	PG 11	.736	18,7	1.220	31,0	.394	10,0	.827	21,0
.315	8,0	.590	15,0	14965	PG 13.5	.807	20,5	1.142	33,0	.394	10,0	.945	24,0
.315	8,0	.590	15,0	14966	PG 16	.890	22,6	1.299	33,0	.394	10,0	.945	24,0
.492	12,5	.807	20,5	14967	PG 21	1.118	28,4	1.575	40,0	.472	12,0	1.181	30,0
.748	19,0	1.083	27,5	14968	PG 29	1.465	37,2	1.575	40,0	.472	12,0	1.496	38,0
1.024	26,0	1.378	35,0	14969	PG 36	1.858	47,2	1.850	47,0	.591	15,0	1.969	50,0
1.299	33,0	1.654	42,0	14970	PG 42	2.134	54,2	1.929	49,0	.591	15,0	2.165	55,0
1.457	37,0	1.929	49,0	14971	PG 48	2.343	59,5	2.047	52,0	.591	15,0	2.559	65,0

Material	Nickel plated brass w/ FPM (viton) gland
Temp Rating	-40°F (-40°C) to 392°F (200°C)
IP rating	IP68/ IP 69K



- Nickel plated brass construction for superior protection of flexible cables.
- Nickel-plated finish over brass provides excellent corrosion resistance and durability.
- IP 68/ IP 69K rated.
- For use in clearance or threaded holes.
- Long PG threads provide additional threads for easy locknut assembly.
- Multiple sizes for flexible cord diameters ranging from .138" (3,5 mm) to 1.929" (49,0 mm).
- We recommend using the smallest cordgrip that accommodates your cable size.
- Sealing gland is molded in Fluorine Rubber (FPM) Material which provides great heat resistance.
- Locknuts not included. For metal locknut specifications or to order locknuts separately, see: NPT, PG, or Metric.
- DFARS Compliant
- Strain relief: Version A acc. to EN 62444

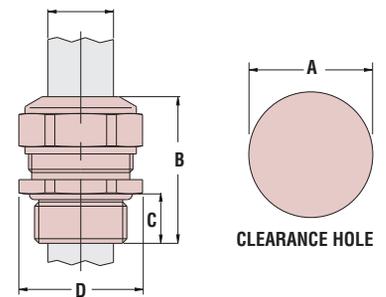

Quick Specs