




Heyco Metal Liquid Tight Cordgrips NPT Hubs

Steel, for Flexible Cords



CABLE DIA. RANGE				PART NO.	DESC.	Gland Color	NPT HUB SIZE	PART DIMENSIONS									
Min. Dia.		Max. Dia.						A Clearance Hole		B Sealing Nut HEX		C Body Nut O.D.		D Overall Length*		E Exposed Length*	
in.	mm.	in.	mm.					in.	mm.	in.	mm.	in.	mm.	in.	mm.		
.150	3,8	.250	6,3	9760	CG 50A-250	Red											
.250	6,3	.350	8,9	9761	CG 50A-350	White											
.350	8,9	.450	11,4	9762	CG 50A-450	Blue	1/2	.875	22,2	1.031	26,2	.937	23,8	1.312	33,3	.812	20,6
.450	11,4	.560	14,2	9763	CG 50A-560	Green											
.550	14,0	.650	16,5	9764	CG 50A-650	Brown											
.150	3,8	.250	6,3	9766	CG 75A-250	Red											
.250	6,3	.35	8,9	9767	CG 75A-350	White											
.350	8,9	.450	11,4	9769	CG 75A-450	Blue	3/4	1.109	28,2	1.031	26,2	1.172	29,8	1.312	33,3	.812	20,6
.450	11,4	.560	14,2	9770	CG 75A-560	Green											
.550	14,0	.650	16,5	9771	CG 75A-650	Brown											
.650	16,5	.750	19,0	9772	CG 75B-750	Yellow	3/4	1.109	28,2	1.250	31,7	1.187	31,2	1.562	39,7	1.031	26,2
.750	19,0	.850	21,6	9773	CG 75B-850	Purple											

*May vary slightly depending on cable diameter.

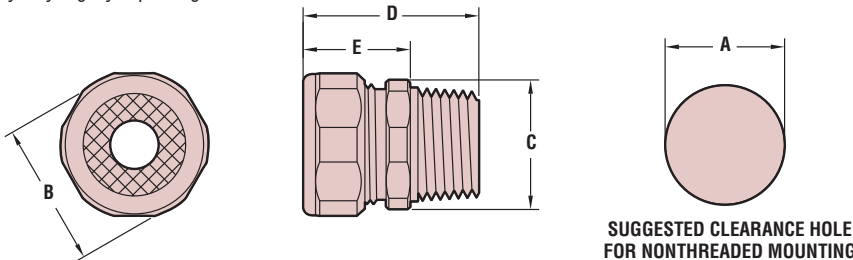


- Multiple sizes with 1/2" to 3/4" NPT hubs, cover a cable diameter range of .150" (3,8 mm) to .850" (21,6 mm).
- Compact design allows fittings to be consecutively ganged—no skipping knockouts—and occupy less "real estate."
- Color coded label system identifies the cordgrips by wire range/grommet opening.
- Neoprene rubber grommet ensures a permanent rain-tight seal around the cable.
- Galvanized steel pressure ring prevents distortion of the grommet when the sealing nut is tightened.
- Body and sealing nut are made of corrosion resistant machined steel. Zinc plated with special brighteners for an attractive finish.
- Temperature Rating: 221°F (105°C).

Zinc-Die Cast, for Flexible Cords

CABLE DIA. RANGE				PART NO.	DESCRIPTION	NPT HUB SIZE	PART DIMENSIONS									
Min. Dia.		Max. Dia.					A Clearance Hole		B Sealing Nut HEX		C Body Nut O.D.		D Overall Length*		E Exposed Length*	
in.	mm.	in.	mm.					in.	mm.	in.	mm.	in.	mm.	in.	mm.	
.190	4,8	.250	6,3	9776	CG 11											
.260	6,6	.375	9,5	9777	CG 12	1/2	.875	22,2	.970	24,6	.900	22,8	1.20	30,5	.80	20,3
.375	9,5	.450	11,4	9778	CG 13											
.440	11,2	.560	14,2	9779	CG 21											
.500	12,7	.650	16,5	9780	CG 22	3/4	1.109	28,2	1.20	30,5	1.10	27,9	1.27	32,3	.87	22,1
.625	15,9	.725	18,4	9781	CG 23											

*May vary slightly depending on cable diameter.

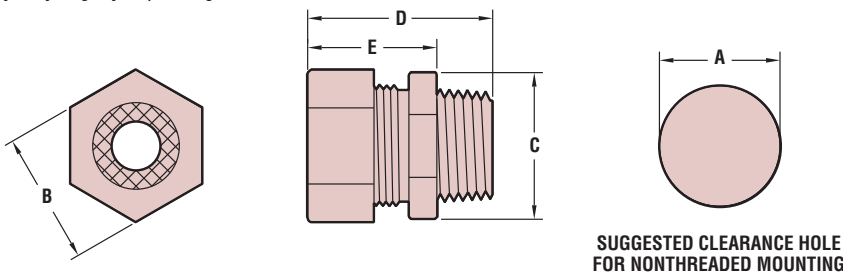

- We recommend using the smallest maximum diameter range cordgrip that will fit your application.
- Cast from zinc alloy, Zamac #3.
- Temperature Rating: 140°F (60°C).

