

# HEYClip™ Nylon UVX\* SunRunner® 2 Series Cable Clips for Micro-Inverter Cables

\*Extended UV Protection

PANEL THICKNESS CLAMPING RANGE				WIRE DIA. RANGE		PART NO.	DESCRIPTION	FOOTPRINT		REAR TAB LENGTH	
Minimum		Maximum		in.	mm.			in.	mm.	in.	mm.
in.	mm.	in.	mm.								
<b>SunRunner 2 UVX</b>											
.08	2,0	.25	6,4	.30 - .47	7,6-12,0	S6463	SunRunner 2 UVX 100 Pack	.50 x 1.44	12,7 x 36,6	.94	23,9
						S6473	SunRunner 2 UVX Bulk				
<b>SunRunner 2-R UVX</b>											
.38	9,7	.38	9,7	.30 - .47	7,6-12,0	S6462	SunRunner 2-R UVX 100 Pack	.50 x 1.44	12,7 x 36,6	.56	14,2
						S6472	SunRunner 2-R UVX Bulk				
<b>SunRunner 2-U UVX</b>											
.25	6,4	.25	6,4	.30 - .47	7,6-12,0	S6461	SunRunner 2-U UVX 100 Pack	.50 x 1.44	12,7 x 36,6	.53	13,5
						S6471	SunRunner 2-U UVX Bulk				



- Designed to hold Micro-Inverter cables .413" to .472" (10,5 to 12,0 mm) in diameter.
- Constructed from extended protection nylon UV material for **lower cost**, excellent strength, and corrosion protection from outdoor exposure.
- Smooth clip edges prevent damage to cable insulation.
- “S” hook clip design will fit a wide variety of extruded aluminum profiles.
- **SunRunner 2 UVX** is designed for solar mounting frames such as the ones used by Unirac, Solar Mount and Mounting Systems.
- **SunRunner 2-R UVX** is designed for racking systems such as the ones used by Haticon Solar and S:FLEX.
- **SunRunner 2-U UVX** features a shorter “S” hook for Unirac and other similar frame profiles.
- Neatly dresses cables on PV panels or along mounting frame channels from .080" (2,0 mm) to .250" (6,4 mm) thick.
- Molded from UV/Heat Stabilized Nylon.
- See page 1-9 for typical rack profile applications.







SunRunner 2 UVX



SunRunner 2-R UVX



SunRunner 2-U UVX

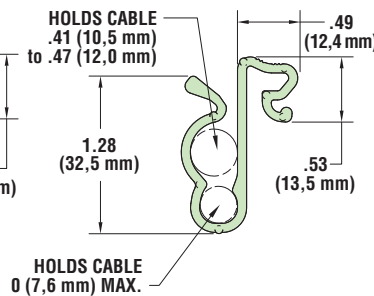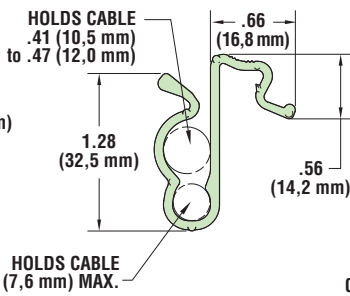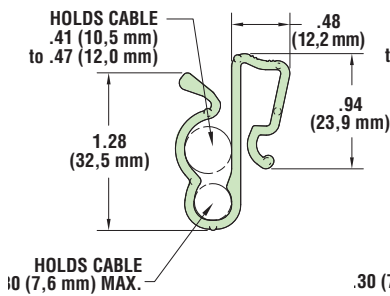

Material	Nylon 6/6 with extended UV capabilities
Flammability Rating	94V-2
Temperature Range	-4°F (-18°C) to 185°F (85°C)

Quick Specs

“Stay Connected” with




Solar Power Components

a PennEngineering® Company

## HEYClip™ Stainless Steel and Nylon UVX SunRunner® 2 and SunRunner® 4-2 Series Cable Clips for Micro-Inverter Cables (Stainless Steel shown below)


### “Where Used” Rack Profiles

**SunRunner 2  
SunRunner 4-2**  
fits Everest, SnapRack,  
and similar rack profiles

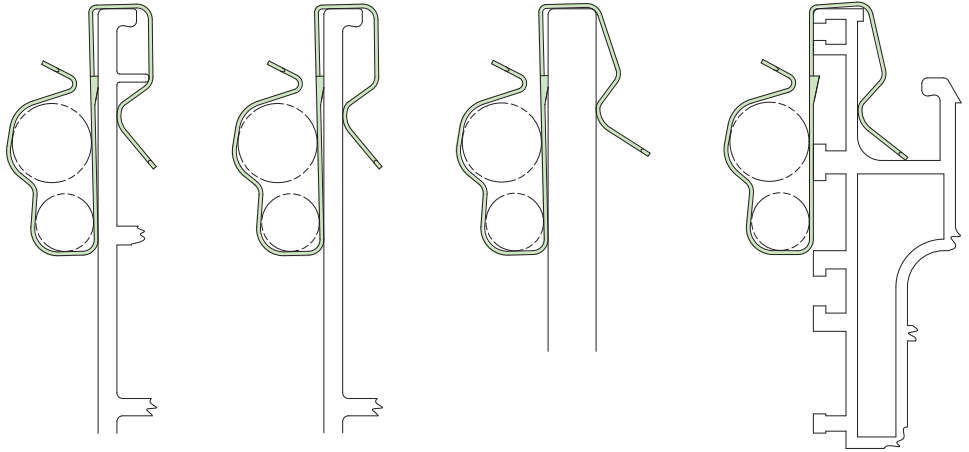


**Consult Heyco  
for clips to meet  
your specific  
rack profile**

**SunRunner 2-R**  
fits Haticon Solar, S-FLEX  
and similar rack profiles



**SunRunner 2-U  
SunRunner 4-2U**  
fits Unirac Solar Mount  
Standard Rail and similar  
rack profiles




- This vinyl coated spring steel clamp secures round cable, ribbon cable, and tubing.
- Vinyl coating protects and insulates.
- Mounts with a #6 (M3,5) screw, yet cable can be inserted and removed without removing the clip.

## HEYClip™ Vinyl Coated Spring Clamps

**ALL NEW  
PRODUCT!**

PART NO.	DESCRIPTION	PART DIMENSIONS							
		A Length		B Clamping Height		C Clamping Length		D Mounting Hole	
		in.	mm.	in.	mm.	in.	mm.	in.	mm.
12710	VCSP-161-09	1.61	40,9	.09	2,3	1.19	30,2	.156	4,0
12711	VCSP-263-09	2.63	66,8	.09	2,3	2.24	56,9		



Material VCSP Body: Stainless steel, w/vinyl coating .02" (0,5 mm) thick  
Coating: Soft, PVC, .032" (0,8 mm) minimum thickness